



- » Digital servocontroller for Servo Tube SA & SC 38 series
- » Supply voltage 90 - 528 VAC
- » For slave operations
- » Safety torque off function (STO)
- » Configuration software
- » Integrated brake resistor
- » BUS interfaces: CANopen | Profinet | EtherCAT

- » Digitale Servosteuerung für Servo Tube SA & SC 38 Baureihe
- » Versorgungsspannung 90 - 528 VAC
- » Für slave Betrieb
- » Funktion Safety Torque Off (STO)
- » Konfigurations-Software
- » Integrierter Bremswiderstand
- » BUS-Schnittstellen: CANopen | Profinet | EtherCAT

IO mode

CANopen version available

Profinet version available

EtherCAT version available

Speed mode

Current mode

Positioning

Service interface

Sinusoidal vector control

Digital inputs

Digital outputs

Oscilloscope software available

Condition monitoring

Safe torque off version available

Programmable

Supply voltage


Certification

Brake output

Interpolation

Ballast circuit

Dimensions in mm/ Maßzeichnung in mm

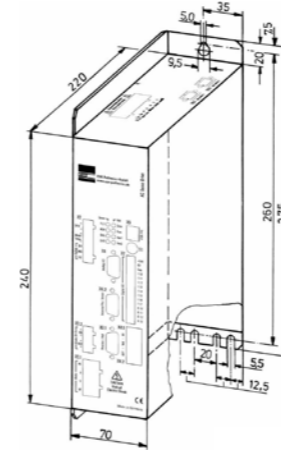

Connectors/ Stecker	Connector description/ Steckerbelegung
X1	Power supply + brake resistor/ Leistungsversorgung + Bremswiderstand
X2	Electronic supply + functional safety (STO)/ Elektronikversorgung + Sicherheitstechnik (STO)
X3	Motor phases/ Motorphasen
X4.1 + X4.2	Field bus interface/ Feldbusschnittstelle
X5	USB parameterization interface/ USB Konfigurationschnittstelle
X6.2	Motor feedback system (SIN/COS)/ Motor Lagegebersystem (SIN/COS)
X7	Digital inputs and outputs/ Digitale Ein- und Ausgänge

Data/ Technische Daten		DME 400x8-I/O	DME 400x8-CAN	DME 400x8-EC	DME 400x8-PN
Nominal voltage power supply/ Versorgungsspannung Leitsung	VAC	3x400...480 +/- 10% 50...60 Hz	3x400...480 +/- 10% 50...60 Hz	3x400...480 +/- 10% 50...60 Hz	3x400...480 +/- 10% 50...60 Hz
Nominal DC-bus voltage/ Zwischenkreisspannung Leistung	VDC	560...680	560...680	560...680	560...680
Nominal voltage electronic supply/ Versorgungsspannung Elektronik	VDC	24 +/- 20%	24 +/- 20%	24 +/- 20%	24 +/- 20%
Peak output current/ Maximaler Ausgangsstrom	A peak	22	22	22	22
Continuous output current/ Zulässiger Dauerausgangsstrom	A rms	8	8	8	8
Continuous consumption electronic/ Stromaufnahme Elektronik	A	0.4	0.4	0.4	0.4
Operation modes/ Betriebsarten	-	Stand-alone Slave	Slave	Slave	Slave
Standard interfaces/ Standard Schnittstellen	-	USB CANopen	USB CANopen	USB EtherCAT	USB Profinet I/O
Motor feedback inputs/ Motorenencoder Eingänge	-	SIN/COS (1Vss) BISS	SIN/COS (1Vss) BISS	SIN/COS (1Vss) BISS	SIN/COS (1Vss) BISS
Digital input/ Digitale Eingänge	-	8	8	8	8
Digital output/ Digitale Ausgänge	-	4	4	4	4
Efficiency at rated operation/ Wirkungsgrad im Nennbetrieb	%	97.8	97.8	97.8	97.8
Dimension (LxWxH)/ Abmessung (LxBxH)	mm	70 x 275 x 200	70 x 275 x 200	70 x 275 x 200	70 x 275 x 200
Weight/ Gewicht	kg	2.8	2.8	2.8	2.8

Safety indices according to EN ISO 13849/ Sicherheitskennzahlen nach EN ISO 13849 PL = e
 Safety indices according to EN 62061/EN 61508/ Sicherheitskennzahlen nach EN 62061/EN 61508 SIL = 3